

HS-150RT Premium Accelerometer


AC acceleration and PT100 temperature output via M12 Connector

Key Features

- Temperature output PT100
- Premium design
- Customisable features

Industries

Building services, Pulp and Paper, Mining, Metals, Utilities, Automotive, Water, Pharmaceutical

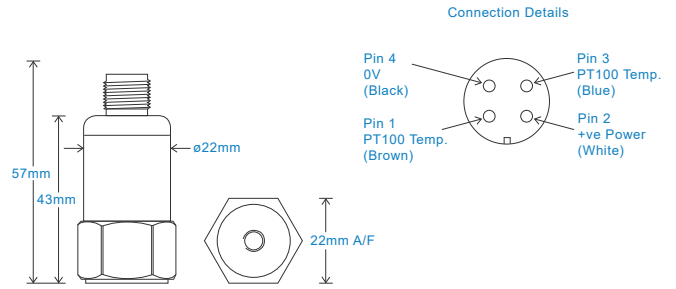

Technical Performance

Mounted Base Resonance	see: 'How To Order' table (nominal)
Sensitivity	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 22°C
Frequency Response	1.5Hz (90cpm) to 10kHz (600kcpm) $\pm 5\%$ 0.5Hz (30cpm) to 12kHz (720kcpm) $\pm 10\%$ 0.2Hz (12cpm) to 15kHz (900kcpm) $\pm 3dB$
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	PT100 (100 Ohms)
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	8Nm
Weight	106gms (nominal) body only
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	see: 'How To Order' table


Electrical

Electrical Noise	0.1mg max
Current Range	0.5mA to 8mA
Bias Voltage	10 - 12 Volts DC
Settling Time	1 second
Output Impedance	200 Ohms max.
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-55 to 150°C
Sealing	IP67
Maximum Shock	5000 g
EMC	EN61326-1:2013


Typical Frequency Response (at 100mV/g)

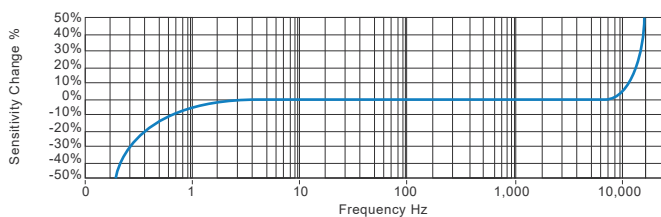

Applications

Fans, Motors, Pumps, Compressors, Centrifuges, Conveyors, Air Handlers, Gearboxes, Rolls, Dryers, Presses, Cooling, VAC, Spindles, Machine Tooling, Process Equipment

Vibration sensor should be firmly fixed to a flat surface (spot face surface may be needed to be produced and cable anchored to sensor body.)



How To Order

Product Prefix	Product Series	Product Code												
HS - Hansford Sensors	150 - Premium Industrial Vibration Sensor	H	S	1	5	0	R	T	X	X	X	X	X	X
Extra Options (if required)	Sensitivity	Range	Resonant Frequency	Cable/Connector	Mounting Threads									
F - Filtered	010 - 10mV/g	$\pm 800g$	28kHz (1,680kcpm)	01 - PUR	01 - 1/4-28" UNF Female									
L - 316L Stainless Steel	030 - 30mV/g	$\pm 250g$	26kHz (1,560kcpm)	54 - M12	02 - 1/4-28" UNF Male									
RT - Temperature Output PT100	050 - 50mV/g	$\pm 160g$	24kHz (1,440kcpm)		05 - Quick Fit Female									
S - 90° Side Exit	100 - 100mV/g	$\pm 80g$	22kHz (1,320kcpm)		06 - M6 x 1mm Male									
Y - 5% tolerance on sensitivity	250 - 250mV/g	$\pm 32g$	20kHz (1,200kcpm)		08 - M8 x 1.25mm Male									
	500 - 500mV/g	$\pm 16g$	18kHz (1,080kcpm)		10 - M10 x 1.5mm Male									



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice

TS285.7

